

RECORD POWER
ESTABLISHED 1909®

Original Instructions

80006 Coronet Cobra Bandsaw Scroll Guide System for SABRE-350

Version 3.1
March 2025



Developed in
partnership with

B O R D E T

FRANCE

Est.



1965

TRAVAIL DU BOIS
OUTILLAGE ET MATERIEL

**MADE IN
BRITAIN**®

**MADE IN
SHEFFIELD**



To register this product please visit
www.recordpower.info

It is important to register your product as soon as possible in order to receive efficient after sales support and be entitled to the full **5 year guarantee**. Your statutory rights are not affected. Please see back cover for contact details.



Always wear safety glasses
when using woodworking
equipment.



Always read the instructions
provided before using
woodworking equipment.

Important

For your safety read instructions carefully before
assembling or using this product.

Save this manual for future reference.

Contents

- 1** Explanation of Symbols
- 2** Record Power Guarantee
- 3** General Health & Safety Guidance
- 4** Additional Health & Safety Guidance for Bandsaws
- 5** Specifications
- 6** Contents of the Package
- 7** Assembly
- 8** Operation
- 9** Maintenance
- 10** Dust Extraction
- 11** Parts Lists & Diagrams

1. Explanation of Symbols

THE SYMBOLS AND THEIR MEANINGS SHOWN BELOW MAY BE USED THROUGHOUT THIS MANUAL. PLEASE ENSURE THAT YOU TAKE THE APPROPRIATE ACTION WHEREVER THE WARNINGS ARE USED.

Mandatory Instructions



Read and fully understand the instruction manual before attempting to use the product



Indicates an instruction that requires particular attention



Wear protective eyewear



Use respiratory protective equipment



Use hearing protection



Use suitable protective footwear



Use protective work gloves

Warning



Indicates a risk of severe personal injury or damage to the machine



Indicates a risk of severe personal injury from electrical shock



Risk of personal injury from lifting of heavy items



Indicates a risk of severe personal injury from airborne objects



Risk of fire

2. Record Power Guarantee

"Products" means the Products sold by Record Power subject to these terms and conditions;

"Record Power" is Record Power Limited, whose company registration number is 4804158 and registered office address is Centenary House, 11 Midland Way, Barlborough Links, Chesterfield, Derbyshire, S43 4XA and sells through a network of Authorised Dealers;

"Authorised Distributor" is the nominated importer for your region who will generally sell through a network of Authorised Dealers. Details of Authorised Distributors for specific countries can be found in the Product manual or at www.recordpower.info;

"Authorised Dealer" is a retailer or business authorised to sell Record Power Products to end users.

1 Guarantee

1.1 Record Power guarantees that for a period of 5 years from the date of purchase the components of qualifying Products (see clauses 1.2.1 to 1.2.9) will be free from defects caused by faulty construction or manufacture.

1.2 During this period Record Power, its Authorised Distributor or Authorised Dealer will repair or replace free of charge any parts which are proved to be faulty in accordance with paragraphs 1.1 above provided that:

1.2.1 you follow the claims procedure set out in clause 2 below;

1.2.2 Record Power, our Authorised Distributor or Authorised Dealer are given a reasonable opportunity after receiving notice of the claim to examine the Product;

1.2.3 if asked to do so by Record Power, its Authorised Distributor or Authorised Dealer, you return the Product, at your own cost, to Record Power's premises or other approved premises such as those of the Authorised Distributor or supplying Authorised Dealer, for the examination to take place;

1.2.4 the fault in question is not caused by industrial use, accidental damage, fair wear and tear, wilful damage, neglect, incorrect electrical connection, abnormal working conditions, failure to follow our instructions, misuse, or alteration or repair of the Product without our approval;

1.2.5 the Product has been used in a domestic environment only;

1.2.6 the fault does not relate to consumable Products such as blades, bearings, drive belts or other wearing parts which can reasonably be expected

to wear at different rates depending on usage (for full details contact Record Power or your local Authorised Distributor);

1.2.7 the Product has not been used for hire purposes, by you or by a previous owner;

1.2.8 the Product has been purchased by you as the guarantee is not transferable from a private sale.

1.2.9 where the Product has been purchased from a retailer, the 5 year guarantee is transferable and begins on the date of the first purchase of the Product and in the event of a claim under this guarantee proof of the original purchase date will be required to validate the warranty period.

2 Claims Procedure

2.1 In the first instance please contact the Authorised Dealer who supplied the Product to you. In our experience many initial problems with machines that are thought to be due to faulty parts are actually solved by correct setting up or adjustment of the machines. A good Authorised Dealer should be able to resolve the majority of these issues much more quickly than processing a claim under the guarantee.

2.2 Any damage to the Product resulting in a potential claim under the guarantee must be reported to the Authorised Dealer from which it was purchased within 48 hours of receipt.

2.3 If the Authorised Dealer who supplied the Product to you has been unable to satisfy your query, any claim made under this Guarantee should be made directly to Record Power or its Authorised Distributor (for details of the Authorised Distributor in your country please see your Product manual or check www.recordpower.info for details). The claim itself should be made in a letter setting out the date and place of purchase, and giving a brief explanation of the problem which has led to the claim. This letter should then be sent with proof of the purchase date (preferably a receipt) to Record Power or its Authorised Distributor. If you include a phone number or email address this will help to speed up your claim.

2.4 Please note that it is essential that the letter of claim reaches Record Power or its Authorised Distributor on the last day of this Guarantee at the latest. Late claims will not be considered.

3 Limitation of Liability

3.1 We only supply Products for domestic and private use. You agree not to use the Product for any commercial, business or re-sale purposes and we

2. Record Power Guarantee

have no liability to you for any loss of profit, loss of business, business interruption or loss of business opportunity.

3.2 This Guarantee does not confer any rights other than those expressly set out above and does not cover any claims for consequential loss or damage. This Guarantee is offered as an extra benefit and does not affect your statutory rights as a consumer.

4 Notice

This Guarantee applies to all Products purchased from an Authorised Dealer of Record Power within the United Kingdom of Great Britain and Northern Ireland. Terms of Guarantee may vary in other countries – please check with the Authorised Distributor in your country (details of the Authorised Distributor for your country can be found in the manual or at www.recordpower.info).

3. General Health & Safety Guidance

Ensure that you carefully read and fully understand the instructions in this manual before assembly, installation and use of this product. Keep these instructions in a safe place for future reference.

WARNING: for your own safety, do not attempt to operate this machine until it is completely assembled and installed according to these instructions.

WARNING: When using any machine, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury.

Safe Operation

1. Use Personal Protective Equipment (PPE)

- The operation of any machine can result in foreign objects being thrown into your eyes, which can result in severe eye damage. Protective eye wear or other suitable eye protection or face shield should be used at all times. Everyday spectacles only have impact resistant lenses. They are not protective eye wear and do not give additional lateral protection.
- Use respiratory protective equipment (dust mask etc.) if the machining operation creates dust. Exposure to high levels of dust created by machining hardwoods, softwoods and man made composite boards can result in serious health problems. Some imported hardwoods give off highly irritating dust, which can cause a burning sensation. The use of respiratory protective equipment should not be seen as an alternative to controlling the risk of exposure at source by using adequate dust extraction equipment.
- The use of ear plugs or ear defenders is recommended when the machine is in use, particularly if the noise level exceeds 85 dB.
- Wear suitable protective gloves when handling cutting tools or blades. Gloves should NOT be worn when using the machine as they can be caught in moving parts of the machine.
- Non-slip safety footwear is recommended when using the machine and handling large work pieces.

2. Dress appropriately

- Do not wear loose clothing, neckties or jewellery; they can be caught in moving parts of the machine.
- Roll up long sleeves above the elbow.
- Wear protective hair covering to contain long hair.

3. Safety warnings

- Find and read any warning labels on the machine.
- It is important that any labels bearing health and safety warnings are not removed, defaced or covered. Replacement labels can be obtained by contacting our

Customer Service Department.

4. Familiarise yourself with the machine

- If you are not thoroughly familiar with the operation of this machine, obtain advice from your supervisor, instructor, or other qualified person or contact your retailer for information on training courses. Do not use this machine until adequate training has been undertaken.

5. Take care when moving or positioning the machine

- Some machines can be very heavy. Ensure the floor of the area in which the machine is to be used is capable of supporting the machine.
- The machine and its various components can be heavy. Always adopt a safe lifting technique and seek assistance when lifting heavy components. In some cases it may be necessary to use mechanical handling equipment to position the machine within the work area.
- Some machines have optional wheel kits available to allow them to be manoeuvred around the workshop as required. Care should be taken to install these according to the instructions provided.
- Due to the nature of the design of some machines the centre of gravity will be high making them unstable when moved. Extreme care should be taken when moving any machine.
- If transportation of the machine is required then all precautions relating to the installation and handling of the machine apply. In addition, ensure that any vehicles or manual handling equipment used for transportation are of adequate specification.

6. The machine should be level and stable at all times

- When using a leg stand or cabinet base that is designed to be fitted to the machine, always ensure that it is securely fastened to the machine using the fixings provided.
- If the machine is suitable to be used on a workbench, ensure that the workbench is well constructed and capable of withstanding the weight of the machine. The machine should always be securely fastened to the workbench with appropriate fixings.
- Where possible, floor standing machines should always be secured to the floor with fixings appropriate to the structure of the floor.
- The floor surface should be sound and level. All of the feet of the machine should make contact with the floor surface. If they do not, either re-locate the machine to a more suitable position or use packing shims between

3. General Health & Safety Guidance

the feet and the floor surface to ensure the machine is stable.

7. Remove adjusting keys and wrenches

- Ensure that all adjusting wrenches and keys are removed before switching the machine 'ON'. There is a risk of severe personal injury or damage to the machine from airborne objects.

8. Before switching the machine 'ON'

- Clear the machine table of all objects (tools, scrap pieces etc.)
- Make sure there is no debris between the work piece and the table / work support.
- Ensure that the work piece is not pressed against, or touching the saw blade or cutting tool.
- Check all clamps, work holding devices and fences to ensure that they are secure and cannot move during machining operations.
- Plan the way that you will hold and feed the work piece for the entire machining operation.

9. Whilst machining

- Before starting work, watch the machine while it runs. If it makes an unfamiliar noise or vibrates excessively, switch the machine 'OFF' immediately and disconnect it from the power supply. Do not restart until finding and correcting the source of the problem.

10. Keep the work area clear

- Working clearances can be thought of as the distances between machines and obstacles that allow safe operation of every machine without limitation. Consider existing and anticipated machine needs, size of material to be processed through each machine and space for auxiliary stands and/or work tables. Also consider the relative position of each machine to one another for efficient material handling. Be sure to allow yourself sufficient room to safely operate your machines in any foreseeable operation.
- Cluttered work areas and benches create the risk of accidents. Keep benches clear and tidy away tools that are not in use.
- Ensure that the floor area is kept clean and clear of any dust and debris that may create trip or slip hazards.

11. Consider the work area environment

- Do not expose the machine to rain or damp conditions.
- Keep the work area well lit and ensure that there is artificial lighting available when there is insufficient natural light to effectively light the work area. Lighting should be bright enough to eliminate shadow and prevent eye strain.
- Do not use the machine in explosive environments e.g.

in the presence of flammable liquids, gases or dust.

- The presence of high levels of dust created by machining wood can present a risk of fire or explosion. Always use dust extraction equipment to minimise the risk.

12. Keep other persons away (and pets)

- The machine is designed to be used by one person only.
- Do not let persons, especially children, touch the machine or extension cable (if used) and keep visitors away from the work area.
- Never leave the machine running unattended. Turn the power supply off and do not leave the machine unattended until it comes to a complete stop.
- If the work area is to be left unattended, all machinery should be switched 'OFF' and isolated from the mains power supply.

13. Store machines safely when not in use

- When not in use, machines should be stored in a dry place, out of reach of children. Do not allow persons unfamiliar with these instructions or with the machine to operate it.

14. Do not overreach

- Choose a working position that allows your body to remain balanced and feed the work piece in to the machine without overreaching.
- Keep proper footing and balance at all times.

15. Electrical supply

- Electrical circuits should be dedicated to each machine or large enough to handle combined motor amp loads. Power outlets should be located near each machine so that power or extension cables are not obstructing high-traffic areas. Observe local electrical guidelines for proper installation of new lighting, power outlets, or circuits.
- The machine must be connected to an earthed power supply.
- The power supply must be equipped with a circuit breaker that provides short circuit, overload and earth leakage protection.
- The voltage of the machine must correspond to the voltage of the mains power supply.
- The mains plug fitted to the machine should always match the power outlet. Do not modify the plug in any way. If a replacement plug is required it should be fitted by a competent person and of the correct type and rating for the machine.
- If you are unsure about any electrical connections always consult a qualified electrician.

3. General Health & Safety Guidance

16. Avoid unintentional starting of the machine

- Most machines are fitted with a no-volt release (NVR) switch to prevent unintentional starting. If in doubt always ensure the machine switch is in the 'OFF' position before connecting it to the power supply. This means the machine will not automatically start up after a power cut or switching on of the power supply, unless you first reset the start switch.

17. Outdoor use

- Your machine should not be used outdoors.

18. Extension cables

- Whenever possible, the use of extension cables is not recommended. If the use of an extension cable is unavoidable, then it should have a minimum core cross section of 2.5mm² and limited to a maximum length of 3 metres.
- Extension cables should be routed away from the direct working area to prevent a trip hazard.

19. Guard against electric shock

- Avoid body contact with earthed or grounded surfaces such as pipes and radiators. There is an increased risk of electric shock if your body is earthed or grounded.

20. Always work within the machine's intended capacities

- Operator safety and machine performance are seriously adversely affected if attempts to make the machine perform beyond its limits are made.

21. Do not abuse the power cable

- Never pull the power cable to disconnect it from the power socket. Always use the plug.
- Keep the power cable away from heat, oil and sharp edges.
- Do not use the power cable for carrying or moving the machine.

22. Secure the work piece

- Ensure that the work piece is securely held before starting to machine it.
- When working within 300 mm of the machining area, always use a push stick to feed the work piece in to the blade or cutting tool. The push stick should have a minimum length of 400 mm. If the push stick becomes damaged, replace it immediately.
- Use extra supports (roller support stands etc.) for any work pieces large enough to tip when not held down to the table top.
- Do not use another person as a substitute for a table extension, or as additional support for a work piece that is longer or wider than the basic table, or to help feed, support, or pull the work piece.

- Do not attempt to machine more than one work piece at a time.
- When feeding the work piece towards the blade or cutting tool never position your hands in direct line of the cutting path. Avoid awkward operations and hand positions where a sudden slip could cause your hand or fingers to move into the machining area.

23. Stay alert

- Safety is a combination of operator common sense and alertness at all times when the machine is being used.
- Use all machines with extreme care and do not use the machine when you are tired or under the influence of drugs, alcohol or medication.

24. Use the correct tool for the job

- Do not use the machine for any purpose other than which it was designed.
- When selecting replacement cutting tools and blades, always ensure that they are designed to cut the material that you intend to use them for. If in any doubt seek further advice from the manufacturer.

25. Connect dust extraction equipment

- Always use dust extraction equipment. The dust extractor should be of suitable size and capacity for the machine that it is connected to and have a filtration level appropriate to the type of waste being collected. Refer to the relevant section of the manual for details of the specific dust extraction requirements for this machine.
- The dust extractor should be switched 'ON' before starting the machine that it is connected to. The dust extractor should be left running for 30 seconds after the last machining operation is complete in order to clear any residual waste from the machine.

26. Ensure that the machine is correctly guarded

- Never use the machine if any of the standard safety guards and equipment are removed or damaged.
- Some machines incorporate safety interlocks to prevent the machine from being used without the guards in place. Never attempt to bypass or modify the interlocks to allow the machine to be used without the guards in place.

27. Maintain your machine with care

- This manual gives clear instructions on installation, set up and operation of the machine and also details any routine and preventative maintenance that should be performed periodically by the user.
- Remember always to switch off and unplug the machine from the power supply before carrying out any setting up or maintenance operations.
- Follow any instructions for the maintenance of

3. General Health & Safety Guidance

accessories and consumables.

- Do not use compressed air to clean the machine. Always use a brush to dislodge dust in places that are awkward to reach and a dust extractor to collect the waste.
- Inspect electric cables periodically and, if damaged, have them replaced by an authorised service facility or qualified electrician.
- Inspect extension cables (if used) periodically and replace if damaged.

28. Keep cutting tools sharp and clean

- Correctly maintained cutting tools are easier to control and less likely to bind.
- Cutting tools and blades can become hot during use. Take extreme care when handling them and always allow them to cool before changing, adjusting or sharpening them.

29. Disconnect the machine from the power supply

- When not in use, before servicing, changing blades etc. always disconnect the machine from the power supply.

30. Check for damaged parts

- Before each use of the machine, it should be carefully checked to determine that it will operate properly and perform its intended function.
- Check for alignment of moving parts, binding of moving parts, breakage of parts and any other conditions that may affect the operation of the machine.
- A guard or other part that is damaged should be properly repaired or replaced by a qualified person unless otherwise indicated in this instruction manual.
- Do not use the machine if the switch does not turn the machine 'ON' and 'OFF'.

- Have defective switches replaced by a qualified person.

31. Warning!

- The use of any accessory or attachment, other than those recommended in this instruction manual, or recommended by our Company may present a risk of personal injury or damage to the machine and invalidation of the warranty.

32. Have your machine repaired by a qualified person

- This machine complies with the relevant safety rules and standards appropriate to its type when used in accordance with these instructions and with all of the standard safety guards and equipment in place. Only qualified persons using original spare parts should carry out repairs. Failure to do this may result in considerable danger to the user and invalidation of warranty.

33. Caution! Motor may become hot during use

- It is normal for motors on some machines to become hot to the touch during use. Avoid touching the motor directly when in use.

4. Additional Health & Safety Guidance for Bandsaws

Safe Operation

1. Familiarise yourself with the machine

- Machining operations using bandsaws have a history of serious accidents. Most result from contact with the moving blade while presenting material to the blade or moving it from the table. Other minor accidents can occur whilst setting, cleaning, adjusting or maintaining the machine.
- The machine is designed for cutting wood and composite board (plywood, MDF etc.). Certain plastics can also be cut using a suitable blade.

2. Before switching the machine 'ON'

- Ensure that the blade is correctly tensioned and aligned on the band wheels and the blade guides are correctly adjusted.
- Ensure that the teeth of the blade are pointing downwards.
- Check the condition of the blade to ensure that no teeth are missing, damaged or deformed and the blade is not cracked or split. If any of these conditions apply, replace the blade immediately.
- Ensure that the saw blade type and width are suitable for the material to be cut.
- Check that the blade width is within the minimum and maximum permitted on the machine and that the thickness of the blade is suitable for the diameter of the wheel.
- Some machines have more than one cutting speed. For most wood cutting applications the faster of the speeds should be used.
- Check the condition of the table insert. Replace it immediately if it is damaged or showing signs of wear.
- Adjust the guard as close as possible to the work piece being cut.

- Check that access doors are fully closed and that the latches are secure.

3. Whilst machining

- Never apply sideways pressure to the blade as this may cause the blade to break.
- Care must be taken when cutting wood with knots, nails or cracks in it and / or dirt on it, as these can cause the blade to get stuck. If this happens, switch the machine 'OFF' immediately and follow the procedure detailed in the manual to remove the blade from the work piece.
- If cutting cylindrical timber use a suitable jig to prevent twisting of the work piece.

4. This machine falls under the scope of the 'Health and Safety at Work etc. Act 1974', and the 'Provision & Use of Work Equipment Regulations 1998'. In addition the elimination or control of risks from wood dust is included in the above regulations and the 'Control of Substances Hazardous to Health (COSHH) Regulations 2002'. We recommend that you study and follow these regulations.

Further guidance can be found in the 'Safety in the use of narrow bandsaws – Woodworking sheet No.31' and the 'Safe use of woodworking machinery' code of practice booklet (L114) published by Health and Safety Executive and available from their website www.hse.gov.uk.

5. Specifications

Guide bearing groove thickness: 0.67 mm


Weight: 1.24 kg

Maximum depth of cut (sliding block blade guides): 280 mm

Maximum depth of cut (spring-loaded blade guides): 220 mm

Scroll blade thickness compatibility: 0.44 mm - 0.65 mm

6. Contents of the Package

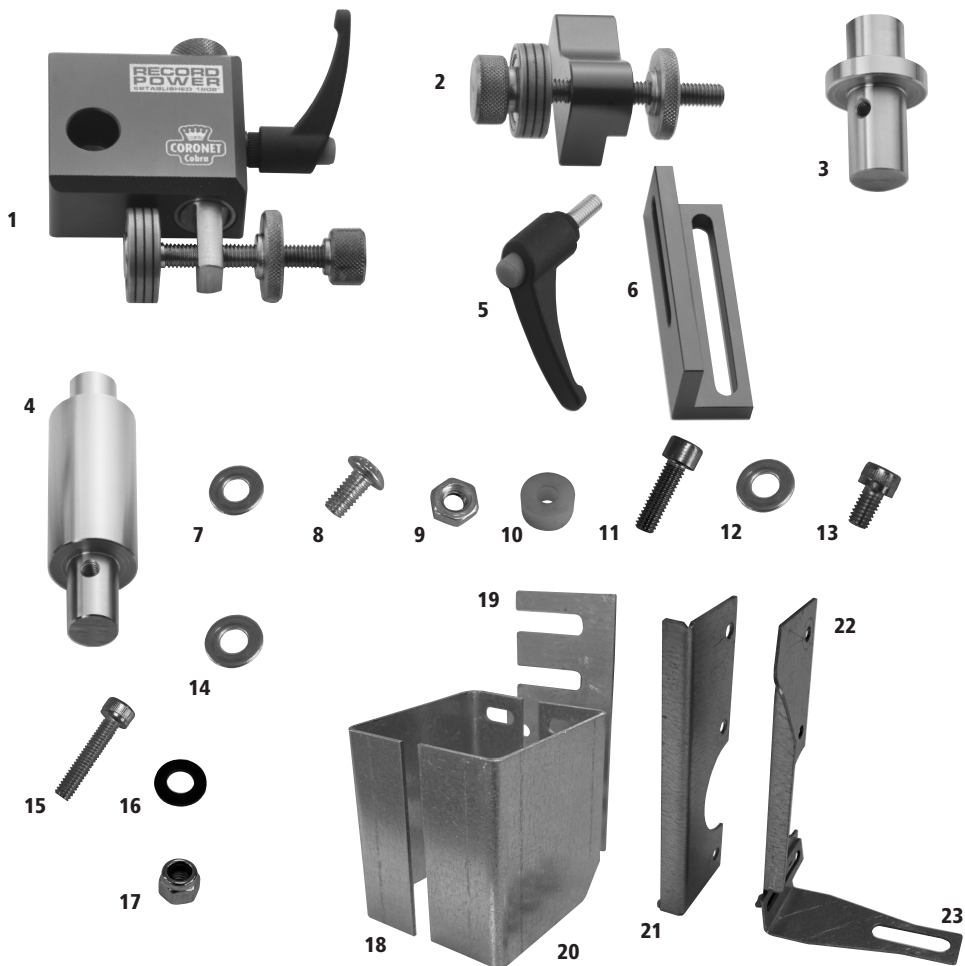

1	Upper scroll guide assembly	1	13	M6 x 12 socket head cap screw	1
2	Lower scroll guide block	1	14	M6 washer	1
3	Tool post shaft (sliding block blade guides)	1	15	M4 x 20 socket head cap screw	2
4	Tool post shaft (spring-loaded blade guides)	1	16	Black washer	2
5	Clamping lever with M6 screw	1	17	M4 lock nut	2
6	Lower guide bracket	1	18	Upper guard A	1
7	M4 washer	12	19	Back plate	1
8	M4 x 8 socket screw	4	20	Upper guard B	1
9	M4 nut	4	21	Lower guard A	1
10	Spacer	2	22	Lower guard B	1
11	M5 x 16 socket head cap screw	2	23	Lower guard bracket	1
12	M5 washer	2			

7. Assembly



Before carrying out the assembly process, ensure that the machine is isolated and disconnected from the electricity supply.



For machines with sliding block blade guides, follow the instructions on this page.



For machines with spring-loaded blade guides, follow the instructions from Fig 7.6 on page 14.



Removing the Bandsaw Blade from the Machine

Remove the bandsaw blade from the machine by following the instructions in the main machine manual.

Removing the Sliding Block Blade Guides from the SABRE-350




To remove the upper sliding block blade guides, loosen and remove the M5 socket head cap screw at the rear of the tool post using a 4 mm hex wrench as shown in **Fig 7.1**.

To remove the lower sliding block blade guides, loosen the M4 socket head cap screw at the side of the table trunnion using a 5 mm hex wrench as shown in **Fig 7.2**.

Fitting the Tool Post Shaft to the Upper Guide Block

To fit the tool post shaft to the upper scroll guide block, loosen the M6 blind set screw using a 3 mm hex wrench, but do not remove fully, **Fig 7.3**.

Insert the lower end of the tool post shaft into the 16 mm hole within the upper scroll guide block, ensuring that the flat surface faces the blind set screw and is positioned as shown in **Fig 7.4**.

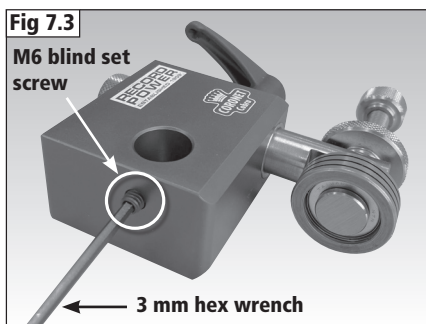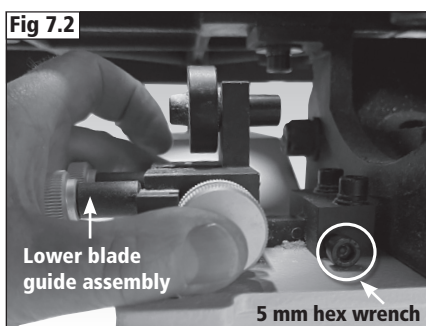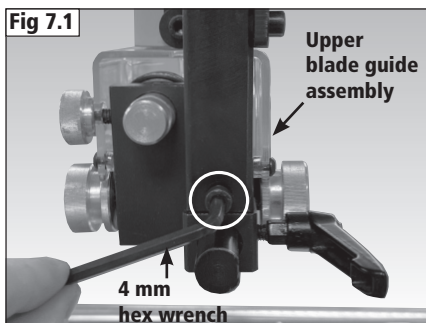

7. Assembly

Fitting the Upper Scroll Guide Assembly to the Machine Tool Post

Insert the top end of the tool post shaft into the bandsaw tool post, then from the rear, thread the M5 socket head cap screw (supplied with the machine) through the hole within the bandsaw tool post and fully tighten, using a 4 mm hex wrench, **Fig 7.5**.



For machines with spring-loaded blade guides, follow the instructions below.



Removing the Bandsaw Blade from the Machine





Remove the bandsaw blade from the machine by following the instructions in the main machine manual.

Removing the Spring-Loaded Blade Guides from the SABRE-350

To remove the upper spring-loaded blade guides, remove the M5 socket head cap screw at the rear of the tool post using a 4 mm hex wrench, **Fig 7.6**.

To remove the lower spring-loaded blade guides, first remove the plastic guarding to gain sufficient access by removing the M6 x 16 socket head cap screw to the right hand side of the guard, as shown in **Fig 7.7** using a 5 mm hex wrench.

Then, remove the two M6 socket head cap screws to the left hand side of the guides using a 5 mm hex wrench as shown in **Fig 7.8**, and remove the lower guide assembly from the machine.

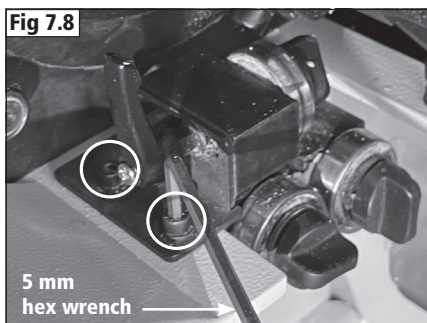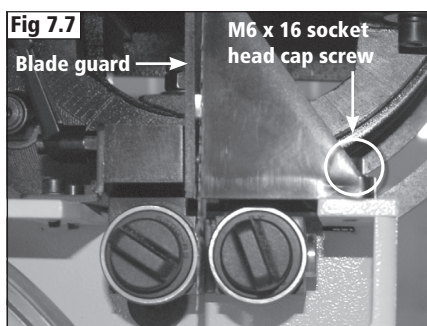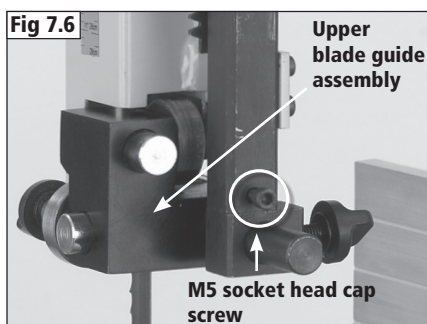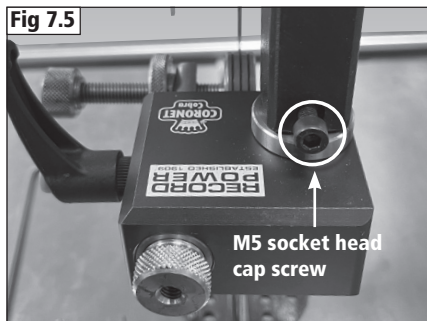

7. Assembly

Fitting the Tool Post Shaft to the Upper Guide Block

To fit the tool post shaft to the upper scroll guide block, loosen the M6 blind set screw using a 3 mm hex wrench, **Fig 7.9**.





Insert the lower end of the tool post shaft into the 16 mm hole within the upper scroll guide block, ensuring that the flat surface faces the blind set screw and is positioned as shown in **Fig 7.10**.

Fitting the Upper Scroll Guide Assembly to the Machine Tool Post

Insert the top end of the tool post shaft into the bandsaw tool post, then from the rear, thread the M6 socket head cap screw (supplied with the machine) through the hole within the bandsaw tool post and fully tighten, using a 5 mm hex wrench, **Fig 7.11**.

Fitting the Lower Scroll Guide Block to the Lower Guide Bracket

Attach the lower guide bracket to the guide block by inserting the screw from the locking handle through the bracket's connecting slot and into the guide block, as shown in **Fig 7.12**.

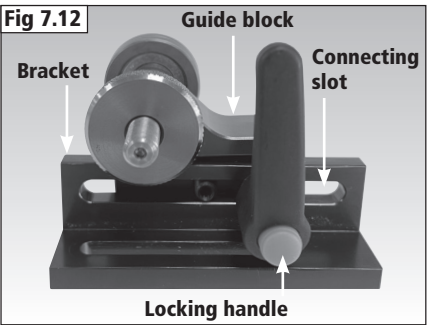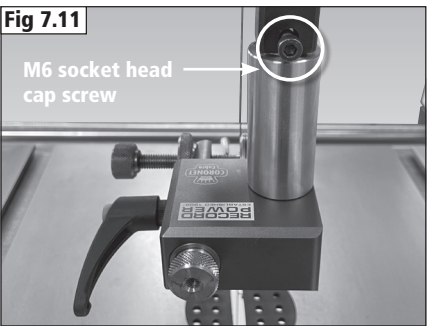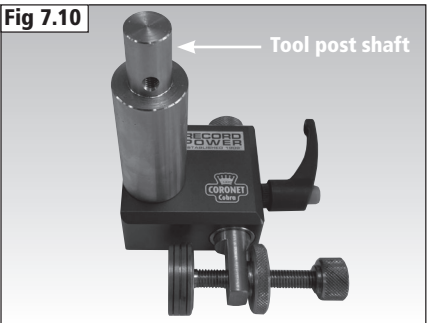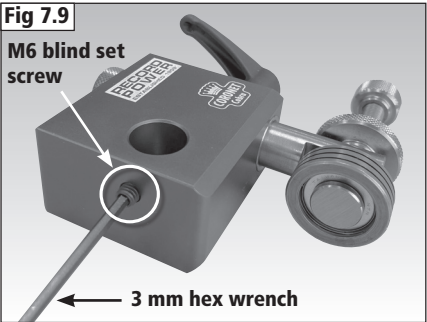

7. Assembly

Fitting the Lower Scroll Guide Assembly to the Bandsaw

Place the lower scroll guide assembly in position with the bracket's connecting slot aligned with the two threaded holes located in front of the table trunnion, as shown in **Fig 7.13**.

Then, insert the two supplied M5 x 16 socket head cap screws (with two M5 washers attached) through the bracket's connecting slots and into the two threaded holes, and secure in place using a 4 mm hex wrench, **Fig 7.14**.



For machines with sliding block blade guides, follow the assembly instructions for the upper scroll guide safety guard on this page.







For machines with spring-loaded blade guides, the upper scroll guide safety guard is not required, due to the design of the machine tool post. Continue to fitment instructions of the lower scroll guide safety guard on page 18 from Fig 7.18.

Assembly of the Upper Scroll Guide Safety Guard

The upper scroll guide safety guard is supplied in three separate parts, complete with all necessary fixings, **Fig 7.15**.

To assemble the upper scroll guide safety guard, place the back plate inside upper guard parts A and B, ensuring the connection holes on the back plate align with the slots on parts A and B, as shown in **Fig 7.16**.

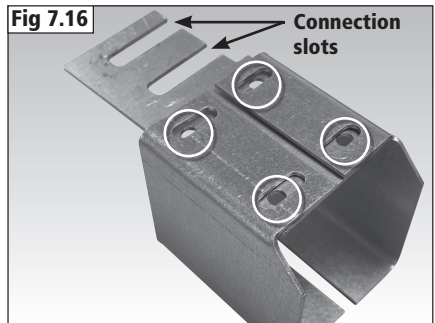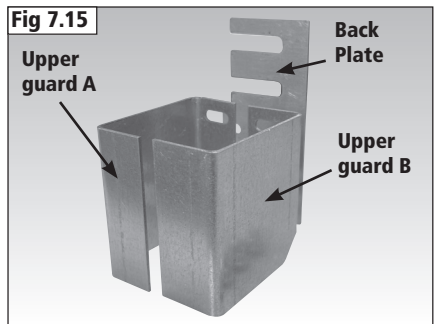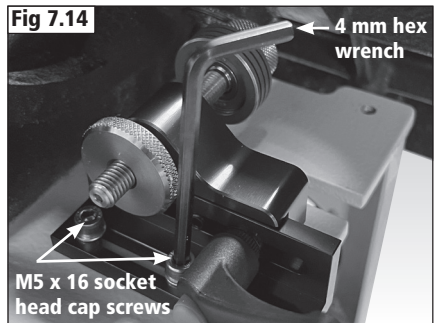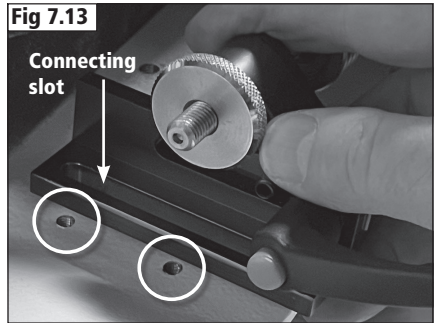

7. Assembly

Ensure that the back plate is in the correct orientation with the two connection slot openings positioned as shown.

Insert four M4 x 8 socket screws and M4 washers from the rear, then secure them from the opposite side with four M4 washers and M4 nuts, using a 2.5 mm hex wrench and a 7 mm wrench, as shown in **Fig 7.17**.






Machines with sliding block and spring-loaded blade guides must follow the assembly and installation instructions for the lower scroll guide safety guard on this page from Fig 7.18.

Assembly of the Lower Scroll Guide Safety Guard

The lower scroll guide safety guard is supplied in three separate parts, complete with all necessary fixings, **Fig 7.18**.

First, thread one M4 x 20 socket screw (with one M4 washer attached) through the upper hole on part B from right to left and position one nylon spacer between guard part A and B, to thread the socket screw through the spacer and into the upper hole on part A.

Secure the fixings in position from the opposite end with one M4 washer and M4 locking nut, using a 2.5 mm hex wrench and a 7 mm wrench, as shown in **Fig 7.19**.

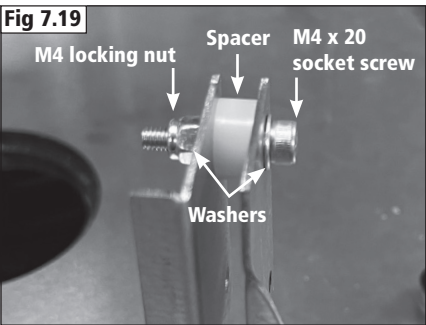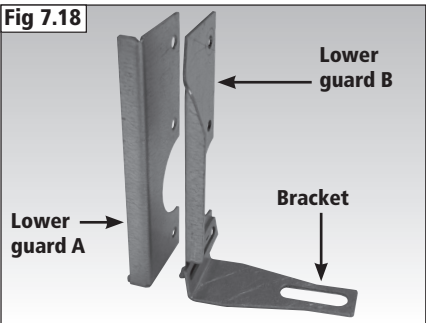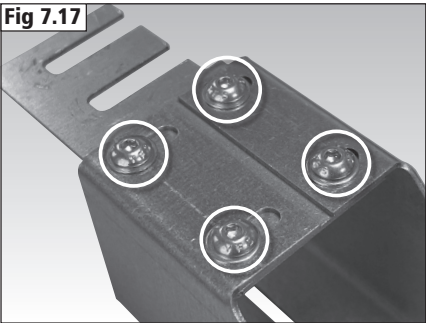

7. Assembly

Fit the remaining socket screw, washers, spacer, and nut into the lower holes of parts A and B, ensuring that the lower guard bracket is positioned as shown in **Fig 7.20**, ready for connection to the machine.



For machines with sliding block blade guides, follow the fitment instructions for the upper scroll guide safety guard on this page.



For machines with sliding block or spring-loaded blade guides, follow the installation instructions for the lower scroll guide safety guard on this page from Fig 7.23.




Fitting the Upper Scroll Guide Safety Guard to the Bandsaw Tool Post

To fit the upper scroll guide safety guard, loosen the two M5 socket head cap screws at the rear of the bandsaw tool post using a 4 mm hex wrench, but do not remove fully, as shown in **Fig 7.21**.

Then, position the upper safety guard connecting slots over the two loosened M5 socket head cap screws (**Fig 7.22**) and re-tighten both screws to secure in place.

Fitting the Lower Scroll Guide Safety Guard to the Machine

To install the lower scroll guide safety guard, position as shown in **Fig 7.23**, and secure in place by threading the supplied M6 x 12 socket screw (with an M6 washer attached) through the bracket and into the threaded hole on the machine.

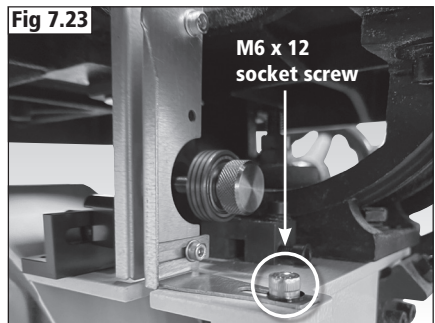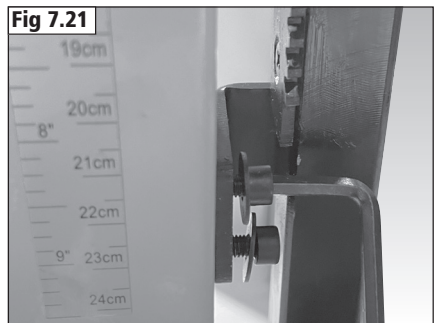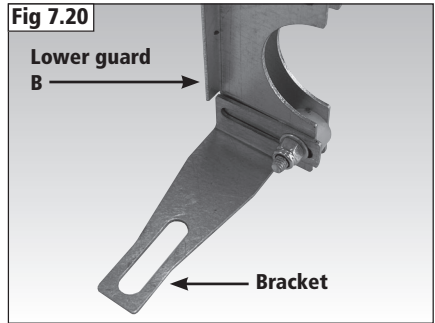

7. Assembly



Before carrying out adjustments, ensure that the machine is isolated and disconnected from the electricity supply.



Fitting the Scroll Blade to the Machine

Before fitting the scroll blade ensure that the machine is fully de-tensioned. Fit the scroll blade around the bandwheels, ensuring it sits centrally, **Fig 7.24**.



Before tracking, apply just enough tension to the blade so that it remains on the bandwheels when rotated by hand.

Tracking the Scroll Blade

Loosen the tracking lock and adjust the tracking knob, located at the rear of the bandsaw, to move the blade forwards or backwards until it is centered, **Fig 7.25**. Once blade tracking is complete, secure the tracking lock before applying full tension.







Warning: Always tension the scroll blade appropriately for the task. Thicker materials and different blade types may require varying levels of tension. Improper tensioning can impact performance and safety. Perform a test cut to check the tension and adjust if necessary.



Tensioning the Scroll Blade

Apply full tension by engaging the cam tension lever at the rear of the machine by placing it into the right hand position (**Fig 7.26**) and use the tension knob at the top of the machine to make any fine adjustments, **Fig 7.27**.

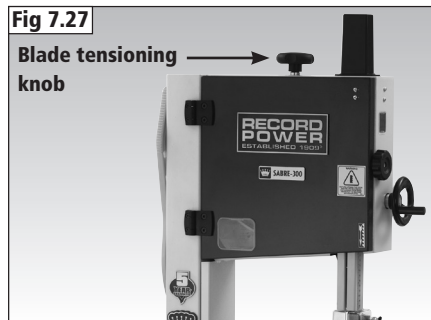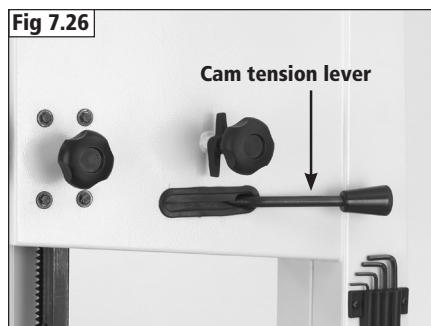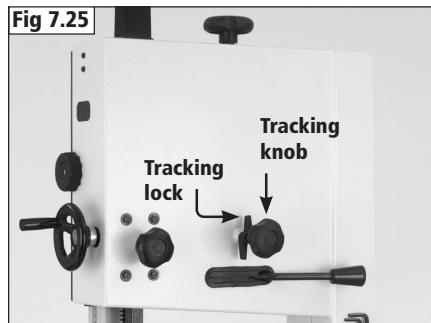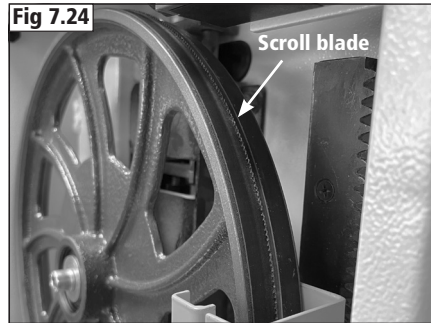

7. Assembly



We suggest testing the tension by the amount the blade will deflect sideways from the top housing of the bandsaw, as shown in **Fig 7.28**. A correctly tensioned blade should not move more than 6 mm/ 1/4" sideways.

If the blade is over tightened it could be damaged.

If the machine is to stand idle for a period it is good practice to slacken tension and re-tension when next using.

Location Grooves on the Upper and Lower Thrust Guide Bearings

Once the blade has been correctly tracked and fully tensioned, the upper and lower thrust guides can be adjusted so that the blade can sit inside 1 of the 3 location grooves on the upper and lower thrust guide bearings, as shown in **Fig 7.29** and **Fig 7.30**.

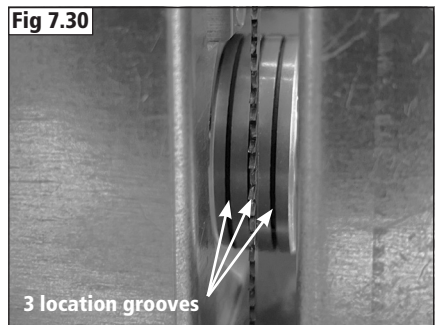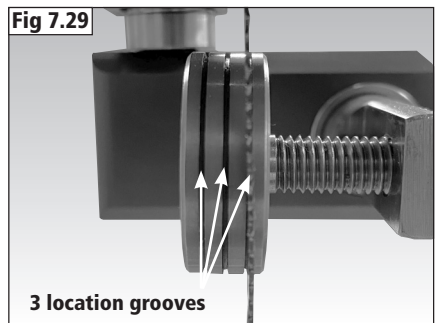

7. Assembly




Adjusting the Upper Thrust Guide Bearing to Move it Towards the Scroll Blade

Loosen the locking handle on the side of the upper guide block, **Fig 7.31**, and rotate the thrust guide adjustment knob, **Fig 7.32**, clockwise.

Rotate the thrust guide adjustment knob anti-clockwise to retract.

Adjusting the Upper Thrust Guide Bearing Left and Right

Loosen the thrust guide adjustment lock, as shown in **Fig 7.33**, and rotate the thrust guide side adjustment knob clockwise or anticlockwise to correctly align with the scroll blade, **Fig 7.34**.

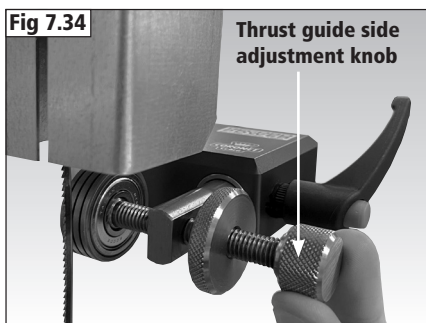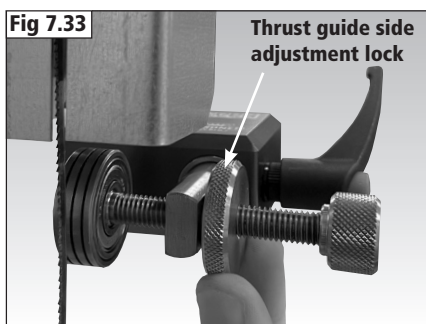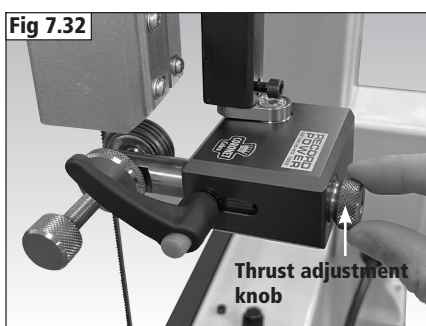

7. Assembly

Adjusting the Lower Thrust Guide Bearing to Move it Towards the Scroll Blade




Loosen the clamping lock and gently pull the lower guide block along the bracket and towards the scroll blade, as shown in **Fig 7.35**.

Adjusting the Lower Thrust Guide Bearing Left and Right

Adjust the lower thrust guide bearing in the same way as the upper thrust guide bearing, as shown in **Fig 7.36** and **Fig 7.37**.



Note: The upper and lower safety guards can be independently adjusted to suit the position of the guides.

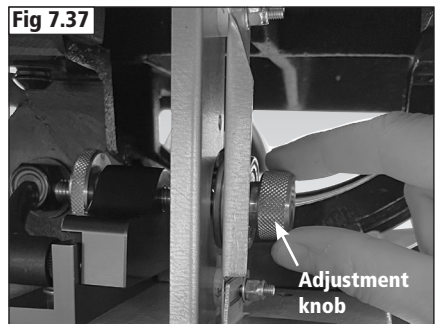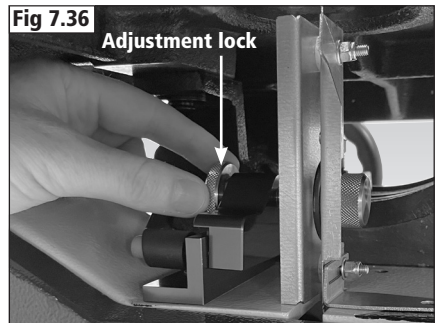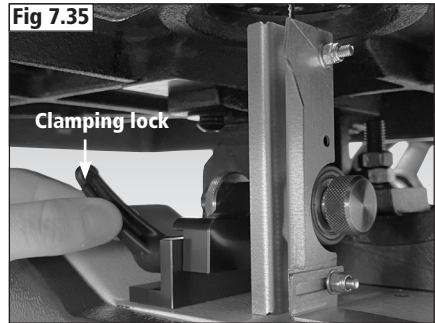

8. Operation

Basic Bandsawing Principles

- The blade cuts on a continuous down stroke.
- Slowly feed the workpiece towards the blade, using only light pressure whilst letting the blade do the cutting.
- Firmly hold the workpiece and feed it towards the blade slowly, keeping your hands well away from the blade.
- For best results the blade must be sharp. Damaged or worn blades should always be replaced.
- To achieve a consistent finish to the workpiece, feed it through the blade at a consistent speed.



CAUTION! Particular care should be taken towards the end of the cut as there will be a sudden decrease in resistance and care must be taken to stop hands from being thrown towards the blade.

Always ensure that your machine is properly maintained and clean. Before commencing work on an important project, it is advisable to familiarise yourself with the operation of the equipment by practising on low value or scrap materials.



WARNING! In the event that the blade stalls whilst cutting, ease the work piece backwards slightly, to release feed pressure from the blade. Allow the blade to reach full speed before continuing to feed the work piece in to the blade. If the blade fails to move when feed pressure is released, immediately switch off the machine and disconnect the power supply before attempting to free the blade from the work piece.



WARNING! If any component of the machine fails whilst in use or if the blade should break whilst the machine is running, immediately switch off the machine and disconnect from the power supply. Remove the faulty component and replace only with genuine Record Power replacement parts. Any electrical components should only be replaced by a suitably qualified person. Always remember to fully release the blade tension mechanism before attempting to fit a new blade. If you are in any doubt about using the machine following a failure or if you need to order replacement spare parts or blades, please contact customer services in your country.

Restarting In the Event of a Blockage or if the Machine Stalls

If the bandsaw stalls due to the blade becoming trapped in the work piece, switch it off immediately by pressing the emergency stop button and wait for the machine to come to a complete stop before proceeding further.

If the blade is trapped within the work piece, it may be necessary to prise the work piece apart slightly using a suitable lever in order to free the blade.

8. Operation

If it is not possible to free the blade using this method, then it may be necessary to cut the blade using suitable side cutters or tin snips.

Replace the blade if necessary and ensure that it is correctly tracked and tensioned and that both doors of the bandsaw are fully closed and secured before attempting to restart the machine.

Blade Selection (TPI)

The selection of the best blade configuration is necessary for optimum cutting performance.

- Correct blade choice is primarily dependant on two factors: material thickness and material type.
- Greater TPI should be selected as material thickness decreases.
- However, if the TPI is too great, the tooth loading will be insufficient to enable penetration; and cutting. The teeth will also rapidly lose their sharpness.
- For thicker material a lower TPI should be used otherwise the gullet will not be sufficient to clear the waste and the blade will stall or burn the wood.
- In general a minimum of 3 teeth should be in contact with the wood at all times during cutting.

Scroll Blades available from Record Power:

80512 Pack of 2 Scroll Blades For SABRE-350
(1/8" x .025 x 14TPI)

80513 Pack of 2 Scroll Blades For SABRE-350
(1/8" x .025 x 18TPI)

80514 Pack of 2 Scroll Blades For SABRE-350
(1/8" x .025 x 24TPI)

9. Maintenance

Cleaning the Thrust Guide Bearings

Ensure that the 3 thrust guide bearing location grooves are kept free from wood dust.

Cleaning the Machine Table

Ensure that the machine table is kept clean and free of debris.



Using Effective Dust Extraction

The use of respiratory protective equipment is recommended to help protect against harmful wood dust.

See **chapter 10** for further dust extraction information.



Spare Parts

If you need to order replacement spare parts or blades, please contact customer services in your country.

10. Dust Extraction

The Importance of Dust Extraction

Suitable dust extraction is essential to avoid the possibility of serious health problems related to wood dust. It is also necessary in order to ensure the waste producing machine performs safely and effectively. Some woods are extremely toxic and in addition to suitable dust extraction machines it is recommended that PPE such as respirators are also used.

Record Power Dust Extraction Machines

Below is a summary of the Record Power range. Please visit your local stockist or go online for full details.

CGV286 CamVac Series Compact Extractor

36 litre capacity, 1 kW single or twin motor, 0.5 micron filtration.

CGV286-3-WALL CamVac Series Wall Mounted Extractor

150 litre capacity, twin motor, 0.5 micron filtration.

CGV336 CamVac Series Medium Extractor

55 litre capacity, 1 kW single or twin motor, 0.5 micron filtration.

CGV386 CamVac Series Large Extractor

90 litre capacity, 1 kW twin or triple motor, 0.5 micron filtration.

CGV486 CamVac Series Heavy Duty Extractor

200 litre capacity, 1 kW triple motor, 0.5 micron filtration.


AC400 2 Stage Air filter with Remote, 3 speeds and Time Delay

Collects airborne dust, 1 micron filtration.

	Bandsaws	Table Saws	Planer Thicknessers	Lathes	Sanding Machines	Dust Extraction Systems	Airborne Dust Collection
CGV286	✓	✓	✓	✓	✓		
CGV286-3-WALL	✓	✓	✓	✓	✓	✓	
CGV336	✓	✓	✓	✓	✓		
CGV386	✓	✓	✓	✓	✓	✓	
CGV486	✓	✓	✓	✓	✓	✓	
AC400							✓

11. Parts Lists & Diagrams


Upper Scroll Guide Assembly

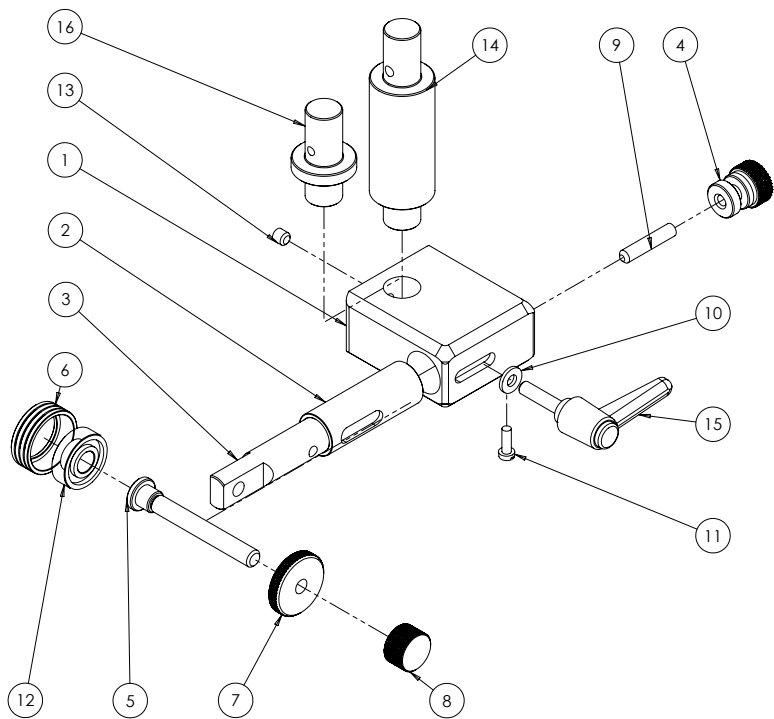

Item No.	Part Number	Description	Quantity
1	ZA0583 (SA0208)	Top guide block	1
2	ZA0659 (SA0215)	Steel tube	1
3	ZA0587 (SA0209)	Thrust guide main shaft	1
4	ZA0585 (SA0210)	Thrust adjustment nut	1
5	ZA0791 (SA0271)	Bearing adjustment thread	1
6	ZA0586 (SA0213)	Bearing cap	1
7	ZA0590 (SA0212)	Thrust guide side adjustment lock	1
8	ZA0591 (SA0211)	Thrust guide side adjustment knurled knob	1
9	99340 M6 x 30	Socket set screw din916	1
10	99357	Black PA flat washer	1
11	99338	M4 x 12 cheese head	1
12	99336	Bearing 6000 ZZ C3	1
13	99339	M6 x 6 socket set screw	1
14	ZA0806 (SA0276)	Cobra guide for sabre 350 tool post long	1
15	99341	Clamping lever with steel screw M6	1
16	ZA0860 (SA0284)	Tool post shaft for sabre 350 (short)	1

11. Parts Lists & Diagrams


Lower Scroll Guide Assembly

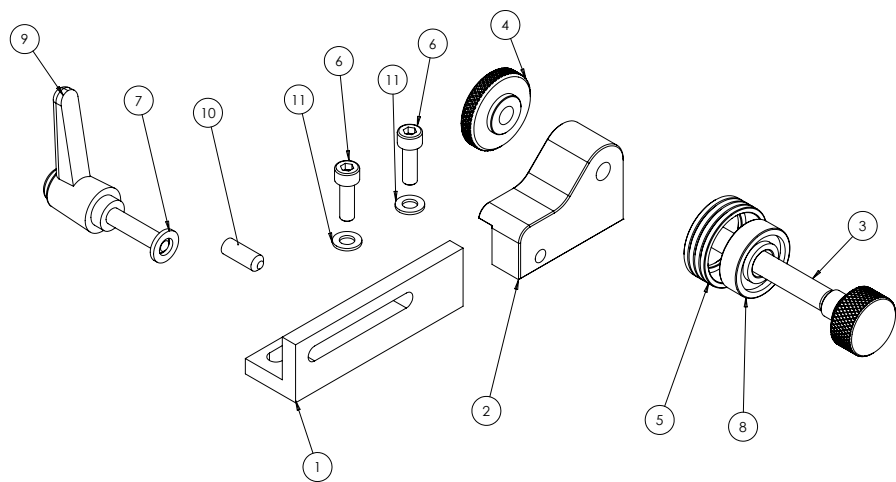

Item No.	Part Number	Description	Quantity
1	ZA0726 (SA0277)	Sabre 350 lower guide "I" bracket	1
2	ZA0727 (SA0278)	Lower guide block for scroll guide	1
3	ZA0729 (SA0279)	Sabre 350 thrust adjustment shaft	1
4	ZA0590 (SA0212)	Thrust guide side adjustment lock	1
5	ZA0586 (SA0213)	Bearing cap	1
6	99445	M5 x 16 socket cap screw, high tensile grade 12.9 bright zinc plated, din 912	2
7	99357	Black PA flat washer for scroll guide assembly	1
8	99336	Bearing 6000 ZZ C3	1
9	99341	Clamping lever with steel screw M6	1
10	99448	M6 x 16 socket set screw high tensile grade 14.9 self colour, din 916	1
11	CVG280-102	M5 bright zinc washer	2

11. Parts Lists & Diagrams


Upper Safety Guard

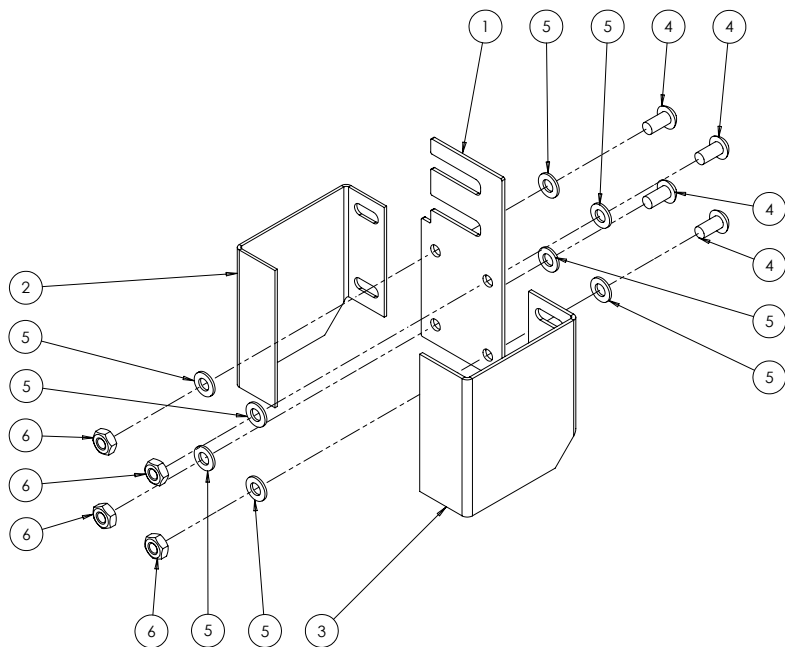

Item No.	Part Number	Description	Quantity
1	ZA0782 (99404)	Upper scroll guard back plate	1
2	ZA0783 (99405)	Upper scroll guard (left)	1
3	ZA0784 (99506)	Upper scroll guard (right)	1
4	99410	M4 x 8 socket button screw ISO 7380	4
5	CVG280-101	M4 bright zinc washer	8
6	99229	M4 full nut grade 8 Z/P DIN934	4

11. Parts Lists & Diagrams

Lower Safety Guard

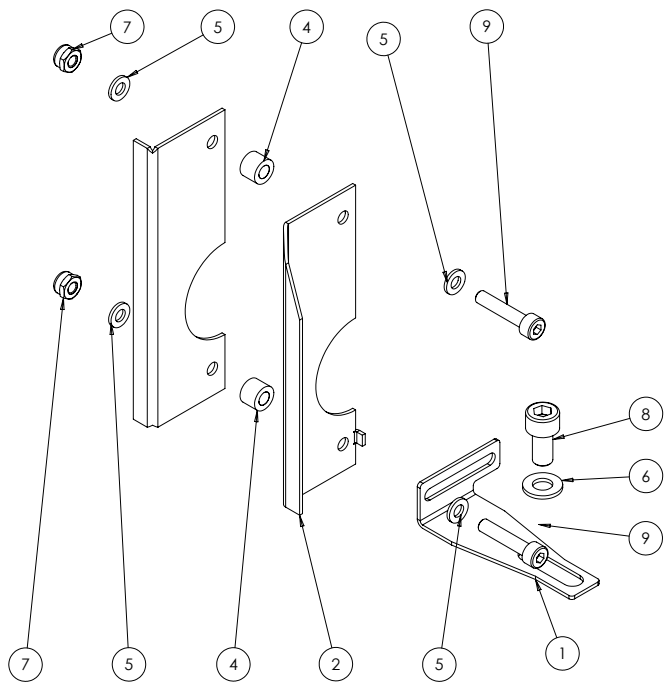

Item No.	Part Number	Description	Quantity
1	ZA0801	Cobra guide for sabre 350 folded guard bracket	1
2	ZA0800	Cobra guide for sabre 350 folded lower right guard	1
3	ZA0799	Cobra guide for sabre 350 folded lower left guard	1
4	ZA0802	Spacer	2
5	DIN 988-S4x8	M4 washer	4
6	DIN 988-S6x12	M6 washer	1
7	DIN EN ISO 10511-M4-C	M4 lock nut	2
8	DIN 912 M6 x 12---12C	M6 x 12 socket screw	1
9	DIN 912 M4 x 20---20C	M4 x 20 socket screw	2



Over
100
 years

Experience • Knowledge
 Support • Expertise

RECORD POWER
 ESTABLISHED 1909®

Woodworking Machinery and Accessories

Record Power Ltd, Centenary House, 11 Midland Way, Barlborough Links, Chesterfield, Derbyshire S43 4XA

Tel: +44 (0) 1246 571 020 Fax: +44 (0) 1246 571 030 www.recordpower.co.uk

To register a product and find your local stockist visit

recordpower.info